

EM01




SLIM UNMONITORED MAGLOCK 12/24VDC

Slim single unmonitored magnetic lock. Its compact design makes it ideal for most indoor applications where 275kg holding force is sufficient.

FEATURES

- MOV provides spike and surge protection
- Fail-safe operation (power to lock)
- Anti-residual magnetism protection
- Top-plate, armature-plate and fixings included
- Dual voltage 12Vdc or 24Vdc (selectable)
- Surface mount
- Silver anodised aluminium finish

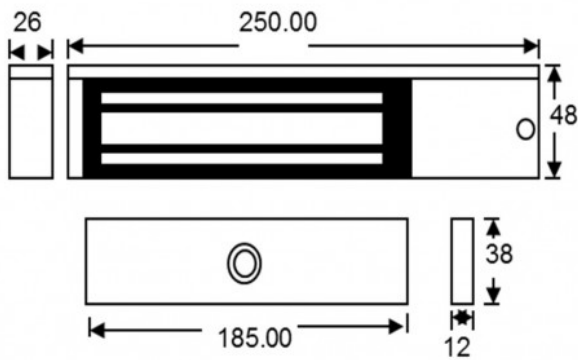

TECHNICAL INFORMATION

- Holding force: up to 275kg (600lb)
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C; Humidity: 0-95% non-condensating
- 250mm X 48 X 26 (Mag dimension)
- Weight: 2kg approx.